


## Double Pitch Roller Chain Style - "A" - DIN 8181 (1.April 2000)

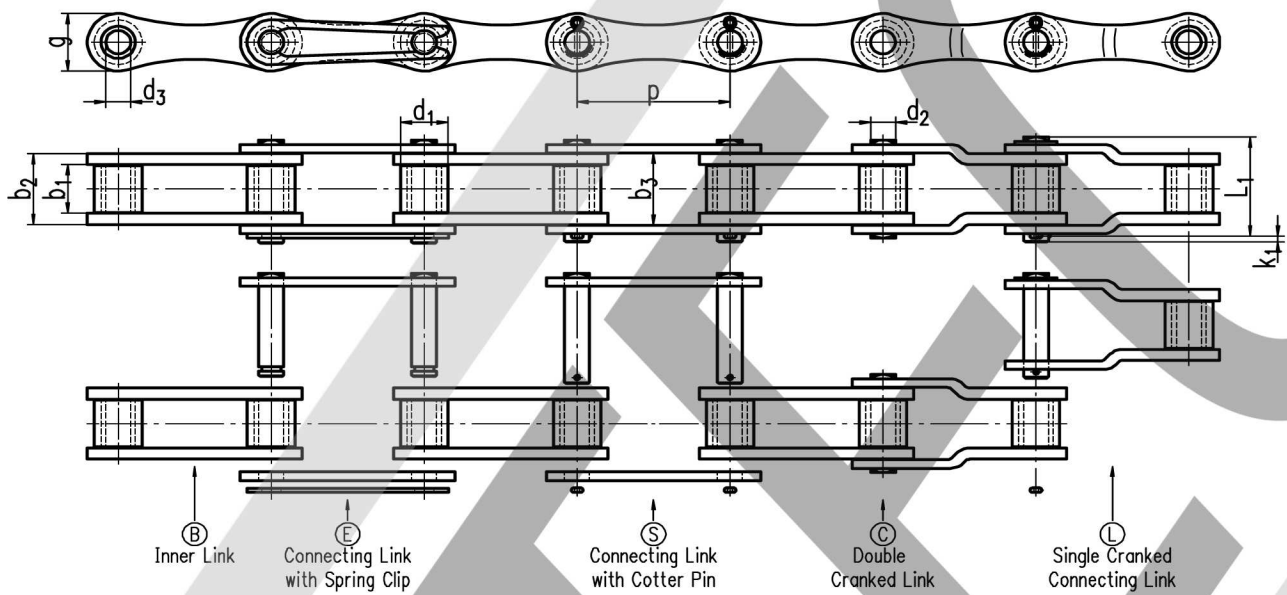

DIN	p	b <sub>1</sub> min. [mm]	b <sub>2</sub> max. [mm]	b <sub>3</sub> min. [mm]	d <sub>1</sub> max. [mm]	d <sub>2</sub> max. [mm]	d <sub>3</sub> min. [mm]	g max. [mm]	K <sub>1</sub> max. [mm]	L <sub>1</sub> max. [mm]	Breaking Load [N]	Weight kg/m
208A-1	25,4	7,85	11,15	11,28	7,95	3,96	4,01	12	3,9	17,8	14.100	0,42
210A-1	31,75	9,4	13,8	13,93	10,16	5,08	5,13	15	4,1	21,8	22.200	0,7
212A-1	38,1	12,57	17,7	17,85	11,91	5,94	5,99	18	4,6	26,9	31.800	1
216A-1	50,8	15,75	22,5	22,7	15,88	7,92	7,98	24,1	5,4	33,5	56.700	1,7
220A-1	63,5	18,9	27,4	27,6	19,05	9,53	9,59	30,1	6,1	41,1	88.500	2,55
224A-1	76,2	25,22	35,3	35,6	22,23	11,1	11,17	36,2	6,6	50,8	127.000	3,5