




Galle Chains - DIN 8150 - (April 1976)

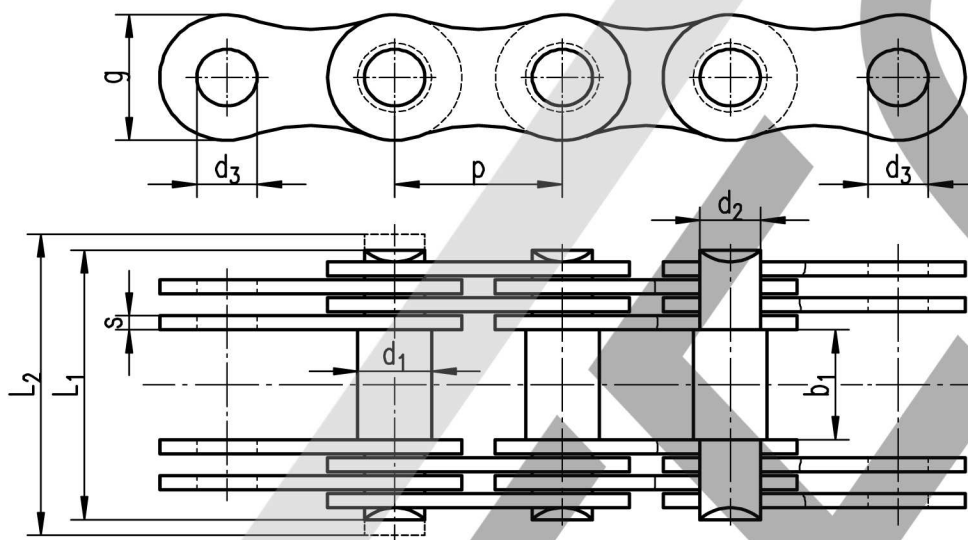


Style - "A"
Endlink

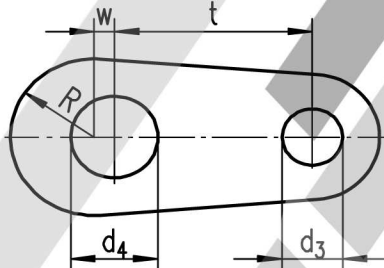


Style - "B"
Pin for
inner Link

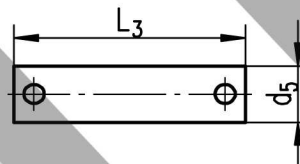

Style - "C"
Pin for
outer Link

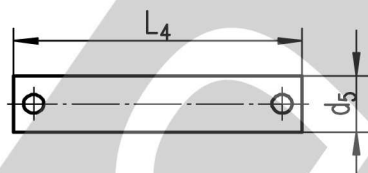

Style - "E"
Connecting Link
with Bush

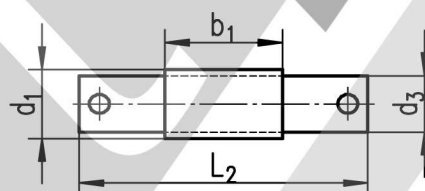

p	b ₁ min.	d ₁ h ₁₁	d ₂ h ₁₁	d ₃ C ¹¹	d ₄ A ¹¹	d ₅ h ₁₁	g max.	L ₁ max.	L ₂ max.	L ₃ max.	L ₄ max.	s	Laschen je Glied	t	r	w	Breaking Load [N]	Weight ca. kg/m
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[mm]	[mm]	[mm]		
15	12	5	4	4	9	9	12	25	27	29	33	2	2	20	9	2	5.000	0,7
20	15	8	6	6	10	10	15	28	33	32	36	2	2	25	10	2	12.500	1,1
25	18	10	8	8	12	12	18	36	42	40	46	3	2	30	12,5	2,5	25.000	1,8
30	20	11	9	9	14	14	20	51	58	54	60	3	4	40	15	3	40.000	3,4
35	22	12	10	10	16	16	26	53	61	55	62	3	4	45	17,5	3,5	60.000	4,5
40	25	14	12	12	18	18	32	58	66	63	70	3	4	50	20	4	80.000	5
45	30	17	14	14	22	22	35	63	70	86	75	3	4	55	22,5	4,5	100.000	7
50	35	22	18	18	26	26	40	90	97	98	108	4,5	4	60	25	5	150.000	11,3
55	40	24	21	21	32	32	42	108	115	118	132	6	4	65	27,5	5,5	200.000	14,5
60	45	26	23	23	36	36	46	114	120	125	139	6	4	70	30	6	250.000	17,1
70	50	32	28	28	40	40	55	148	157	156	169	6	6	85	35	7	375.000	34
80	60	36	32	32	50	50	60	159	171	176	189	6	6	100	42,5	8,5	500.000	39
90	70	40	36	36	60	60	70	184	200	199	214	7	6	120	50	10	750.000	53
100	80	45	40	40	70	70	80	224	234	239	256	7	8	140	60	12	1.000.000	77
110	90	50	45	45	80	80	90	236	251	264	279	7	8	160	70	14	1.250.000	90
120	100	55	50	50	90	90	100	262	277	287	306	8	8	180	80	16	1.500.000	112